


# SPECIFICATIONS—LINEAR ROTARY PRECISION

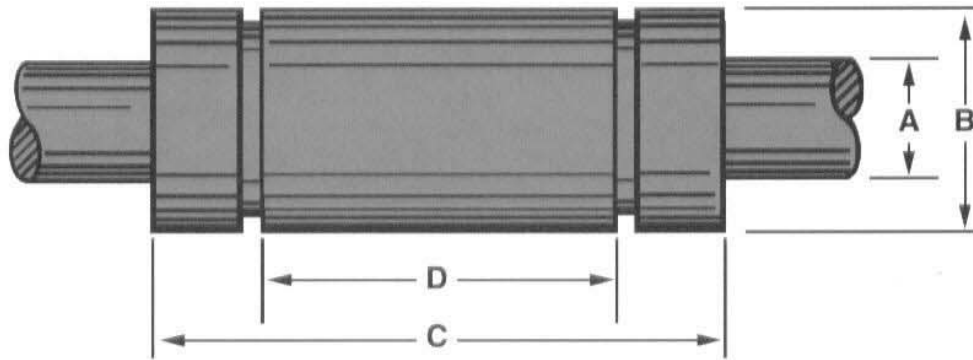

Bearing No.	WORKING BORE				OUTSIDE DIAMETER		LENGTH	
	A	LR	LRP		B	Tolerance + .0000 to	C	Tolerance + .0000 to
		Tolerance + .0000 to	Tolerance + .0000 to	Concentricity (T.I.R.)				
6	.3750	-.0005	-.0003	.0005	.6250	-.0004	.875	-.015
8	.5000	-.0005	-.0003	.0005	.8750	-.0004	1.250	-.015
10	.6250	-.0005	-.0003	.0005	1.1250	-.0004	1.500	-.015
12	.7500	-.0005	-.0003	.0005	1.2500	-.0004	1.625	-.015
16	1.0000	-.0005	-.0003	.0005	1.5625	-.0004	2.250	-.015
20	1.2500	-.0006	-.0004	.0010	2.0000	-.0005	2.625	-.020
24	1.5000	-.0006	-.0004	.0010	2.3750	-.0005	3.000	-.020
32	2.0000	-.0008	-.0004	.0010	3.0000	-.0006	4.000	-.020
40	2.5000	-.0010	-.0005	.0015	3.7500	-.0008	5.000	-.025
48	3.0000	-.0012	-.0006	.0015	4.5000	-.0010	6.000	-.030
64	4.0000	-.0020	-.0010	.0020	6.0000	-.0012	8.000	-.040